


COUNTERBORE DIAMETER SIZE GUIDELINES

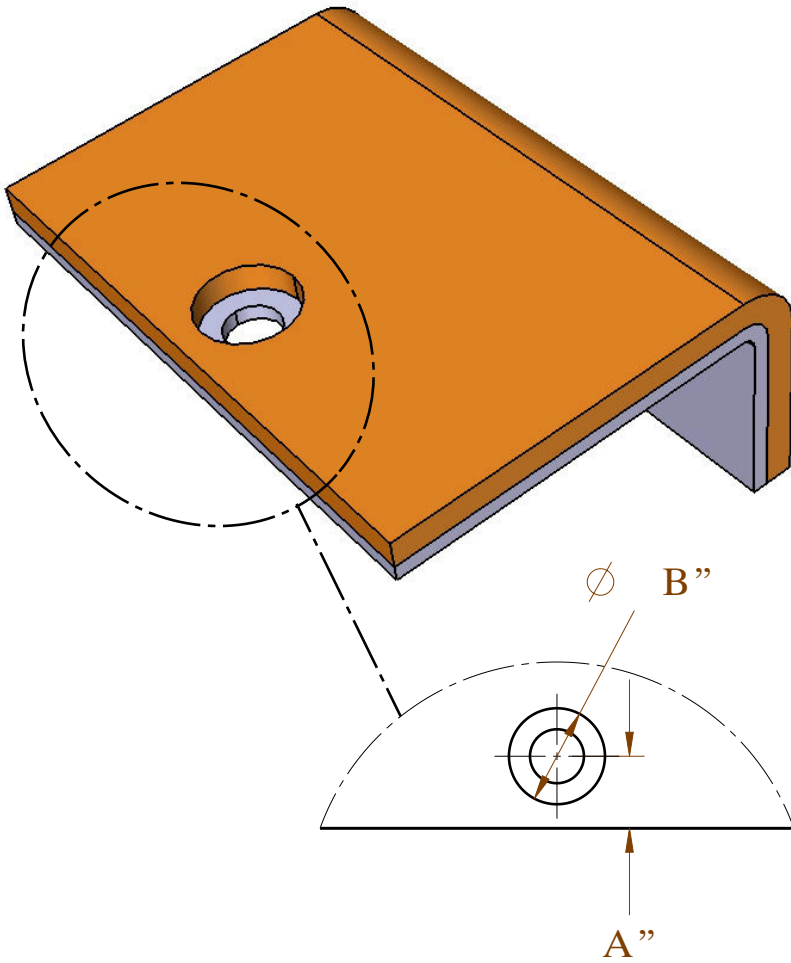

Orange Vinyl

C-Bore size	Minimum Distance from Edge
B''	A''
0.375	0.31
0.437	0.34
0.500	0.38
0.562	0.41
0.625	0.44
0.687	0.47
0.750	0.50
0.812	0.53
0.875	0.56
0.937	0.60
1.00	0.63

Blue Foam / Twincoat

C-Bore size	Minimum Distance from Edge
B''	A''
0.375	0.38
0.437	0.41
0.500	0.44
0.562	0.47
0.625	0.50
0.687	0.53
0.750	0.56
0.812	0.60
0.875	0.63
0.937	0.66
1.00	0.69

Foam & BTC With Bends

C-Bore size	Minimum Distance from Edge
B''	A''
0.375	0.44
0.437	0.47
0.500	0.50
0.562	0.53
0.625	0.56
0.687	0.60
0.750	0.63
0.812	0.66
0.875	0.69
0.937	0.72
1.00	0.75

MATERIAL TYPE
VINYL - BLUE FOAM - TWINCOAT

GUIDELINES

DATE: 03-23-23

 **Dunnage Engineering**

800-443-5553

www.dunnage-eng.com